




E-mail: distributor@hyggeraquarium.com

Website: www.hyggeraquarium.com



HG250 USER MANUAL

hygger Purifying Aquarium Tube Light

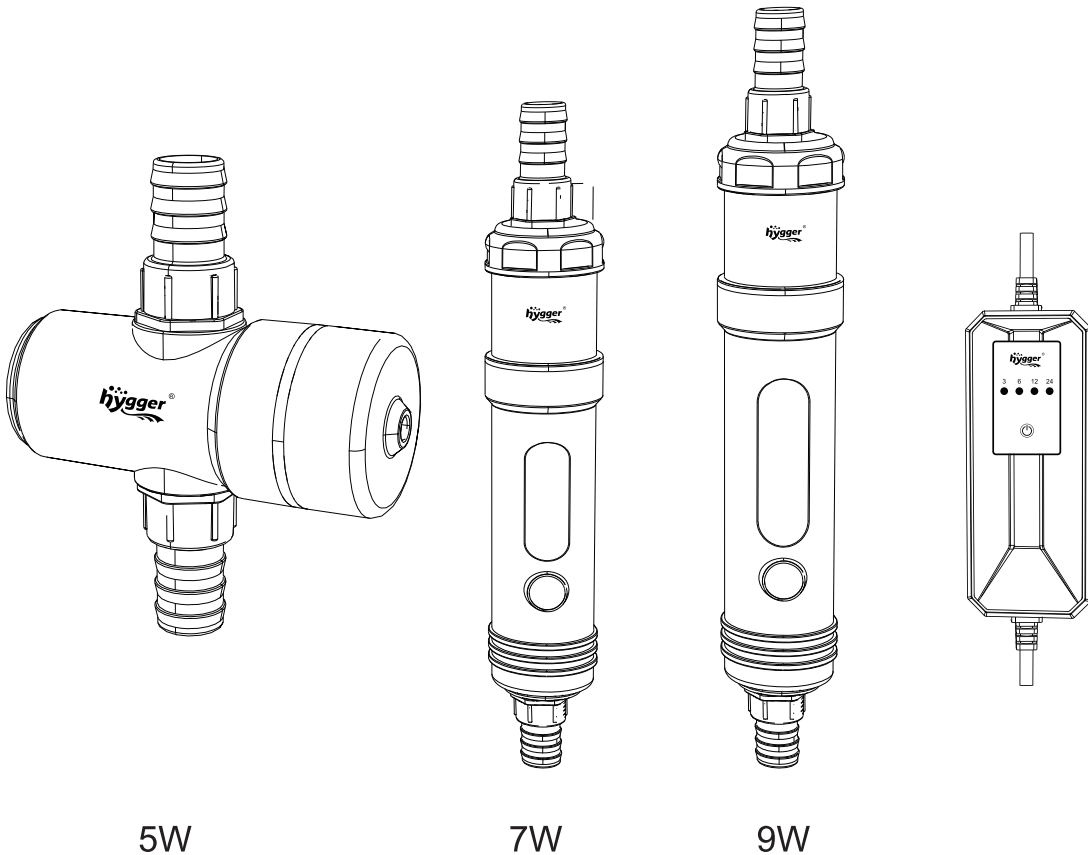

The hygger Purifying Aquarium Tube Light is specifically engineered to combat and inhibit the growth of harmful microorganisms, including bacteria, yeast, algae, molds, and other detrimental pathogens, ensuring a cleaner aquatic environment.

Please read this manual carefully before use and keep it for future reference; follow the instructions to ensure proper use.


1. PRODUCT FEATURES

- **Enhanced Clarity & Aquatic Health:** This UV light is engineered to sterilize water, eliminate green algae, and restore water clarity, ensuring a crystal-clean and healthy environment for your aquatic life.
- **Safe & Compact Design:** Featuring a fully sealed plastic ring and a compact structure, the protective casing blocks U-V-C rays entirely.
- **Smart Timer with Memory Function:** Easily set the timer to 3, 6, 12, or 24 hours with a single tap of the power switch. The UV light automatically controls on/off cycles and retains your preferred settings for hassle-free operation.
- **Universal Compatibility:** Designed to work with most aquarium filter systems, the UV light integrates seamlessly between water pipes. Submersible and adaptable to freshwater and saltwater aquariums.

2. PRODUCT SPECIFICATIONS

Model	HG250		
Volt/Freq	US standard: AC 110-120V/60Hz EU/UK/AU standard: AC 220-240V/50Hz		
Light Power	5W	7W	9W
Product Dimensions	1.85"(Ø) x 4.57"(H) 47(Ø) x 116MM(H)	1.97"(Ø)x 9.05"(H) 50(Ø) x 230MM(H)	1.97"(Ø) x 10.43"(H) 50(Ø) x 265MM(H)
Hose Adapter Dimensions	0.51"(Ø)/0.63"(Ø)/0.75"(Ø) 13MM(Ø)/16MM(Ø)/19MM(Ø)		
Light Source Type	U-V-C		
Power Cord	7.55FT (230CM)		


3. INSTRUCTIONS FOR USE

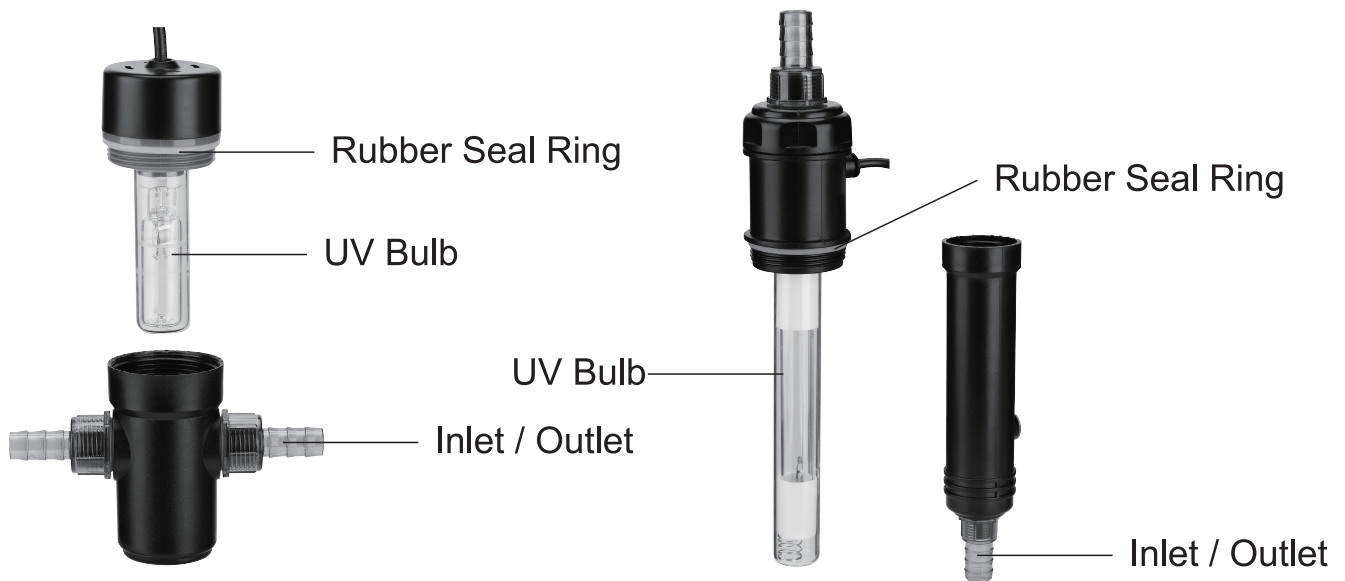


1. Unbox the product and carefully inspect the UV light and power cord for any signs of damage. If any damage is found, avoid using the light.

2. The UV light can be connected to a water hose for in-tank and external use. Please note that the water hose is not included in the packaging. You may use the water hose from the canister filter or install compatible hoses that match the water hose fittings.

Picture 1 Installed in the aquarium

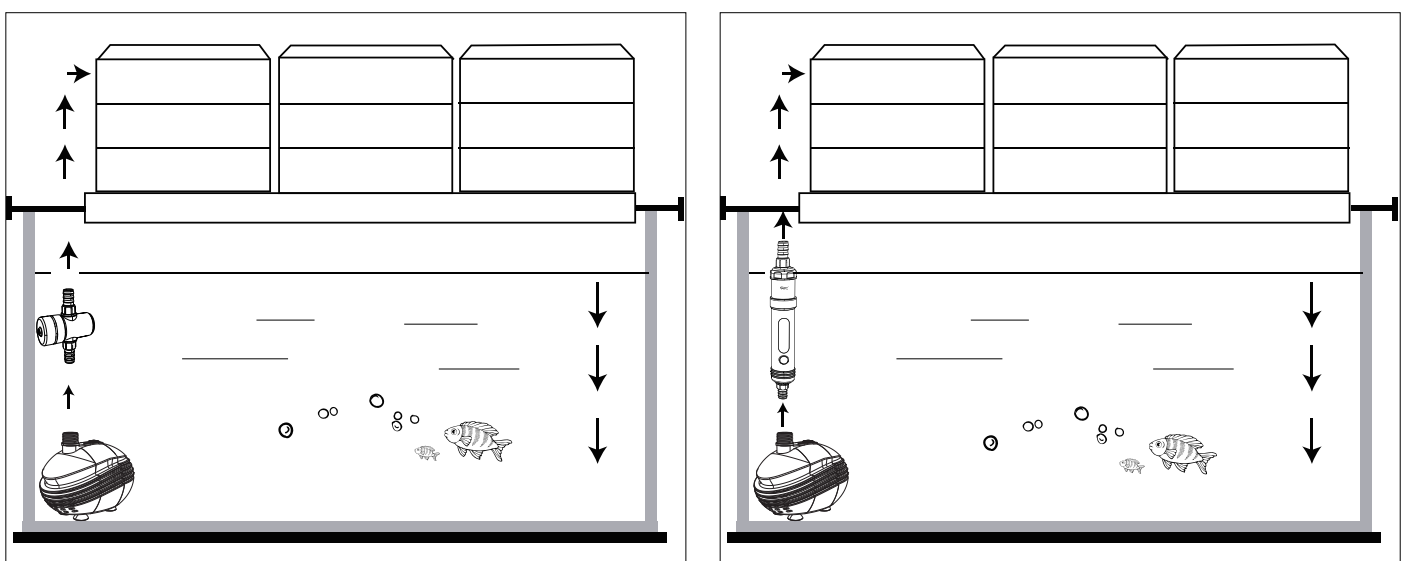

Picture 2 Connected to the canister filter (for use outside the tank)

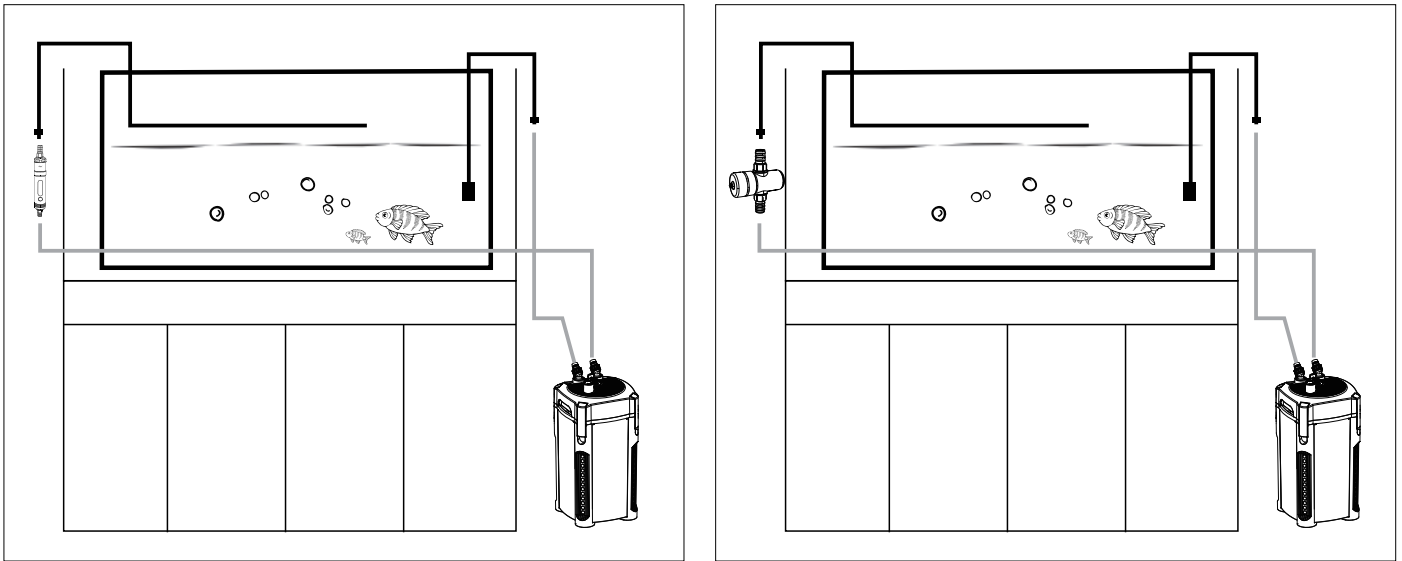


3. To prevent leakage, ensure all UV light connections are securely tightened before use. Please select the appropriate hose fittings from the provided pairs for installation and secure them in place with stainless steel clamps. If there's still a leak, wrap the Teflon tape around the connection several times.



Tightened



Not tightened easy to leak

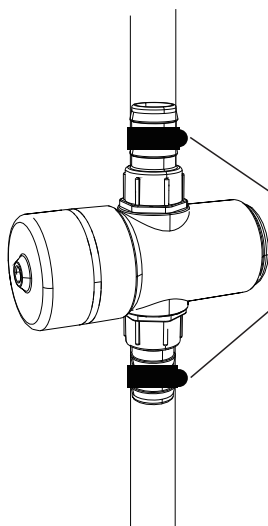

Stainless steel clamps at the pipe connection

4. Connect the power supply and start using it.

5. Choose your desired lighting duration: 3H, 6H, 12H, or 24H daily. Press the button to select your preferred option. For example, selecting 3H will turn on the green 3H indicator, and the UV light will operate for 3 hours. After the cycle completes, the indicator will flash to signal the UV light turning off. The UV light will automatically restart at the same time the next day based on your initial setting.

6. Press and hold the button until the "24" indicator lights up, then press it again. The indicator and light will turn off simultaneously.

Caution: UV light is hazardous to human health. Avoid direct exposure to the eyes without proper protection.

7. UV Light Status Indicator: The operational status of the 5W UV light can be monitored via the light emitted from the semi-transparent hose adapter. For 7W and 9W models, the status is indicated by the small translucent lens on the housing. Confirm proper UVC light operation by checking for a light blue glow through the designated indicator. The indicator light is eye- and skin-safe, posing no risk of UV exposure.

8. To maintain optimal transmittance, the light requires regular cleaning. Accumulation of any residue on the exterior of the light can reduce its cleaning efficiency. It is recommended that the light be cleaned every few months to prevent a gradual decline in transmittance over time.

9. If the desired cleaning effect is not achieved upon initial use, you can troubleshoot the issue by considering the following aspects.

A. Adjust the water flow rate. The UV light should be placed in areas with water circulation to maximize UV light-water contact. However, the water flow speed should not be too high, ensuring a contact time of at least 1 second.

B. Extend the operation time of the light, as the cleaning effect will improve in direct proportion to the increased exposure time.

10. Operating the UV light for 3 hours daily is recommended to maintain water quality in a stable fish tank environment.

How to clean the UV light

Step 1: Unscrew the light shield



Step 2: Clean the quartz glass light tube



Tube Replacement: Operate only when it is necessary to replace the UV light bulb.

Step 1: Pull out the quartz glass light tube

Step 2: Pull out the UV bulb and replace it

Step 3: Reinsert the quartz glass light tube

Step 4: Ensure that the light tube is securely installed



Step 5: Install the light shield

5W





7W/9W

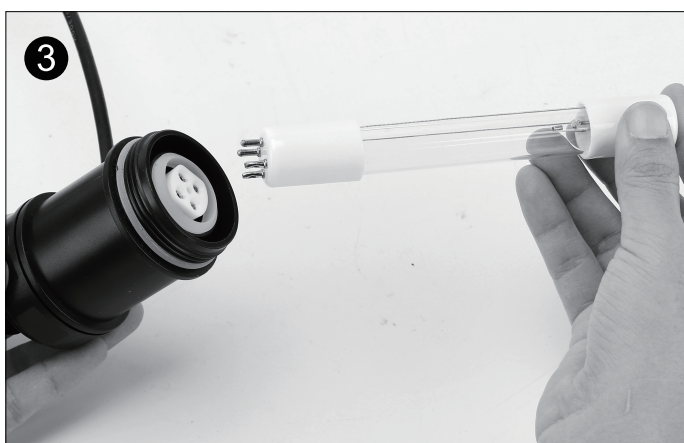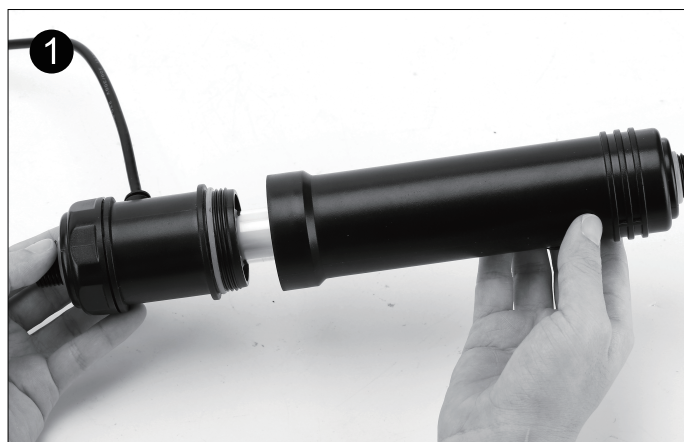

4. PACKING LIST

HG250-5W

1 x UV light with timer
2 x Stainless steel clamp
1 x User manual
6 x Hose adapter

HG250-7W/9W

1 x UV light with timer
2 x Stainless steel clamp
2 x Suction cup
1 x User manual
6 x Hose adapter

5. ATTENTIONS

- This UV light is equipped with functions to sterilize water, eliminate green algae, and restore water clarity.
- If a power outage occurs while the UV light is on, it will resume operation based on its original schedule after power restoration. If the outage occurs during the scheduled off period, the light will activate immediately upon power recovery, adhering to the preset timing. Deviations from the programmed schedule (delays/advancements) caused by unexpected outages are normal.
- The power plug and UV time controller are not waterproof. Keep them away from water and moisture. Never touch the power plug with wet hands; always turn off the power before cleaning.
- Ensure the working voltage matches the voltage specified for the UV light to prevent damage.
- Protect your eyes from direct exposure when cleaning or replacing the UV light. This should be done during a power outage or while wearing protective eyewear.
- If the UV light malfunctions, it should only be repaired by a professional to ensure safety and proper functioning.
- This product is not a toy. Keep it out of reach of children to prevent accidents.
- Before use, ensure all UV light connections are tightly sealed to prevent water ingress, which could cause safety issues.
- The UV light is designed to operate within a temperature range of 40°F to 95°F (4°C to 35°C). To ensure optimal performance, ensure the environment is within this range.

6. WARNING

To avoid possible electric shock, do not immerse the switch in the water. If the switch falls into the water or becomes wet, do not touch it until you have unplugged it. Basic safety precautions that should be observed including the following:

1. Read and follow this user manual strictly.

2. DANGER- To avoid possible electric shock, special care should be taken since water is employed in the use of aquarium equipment. For each of the following situations, do not attempt to repair yourself. Instead, return the UV light to an authorized service facility for maintenance or discard it.


A.If the UV light falls into the water, DO NOT touch it. First unplug it, then retrieve it. If electrical components of the light get wet, unplug it immediately.

B.Carefully examine the UV light after installation. It should not be plugged in if there is water on parts that are not intended to be wet.

C.Do not operate the UV light if it has a damaged cord or plug, is malfunctioning, dropped, or damaged in any manner. The power cord of this UV light cannot be replaced. If the cord is damaged, the UV light should be discarded.

D.To avoid the possibility of the UV light plug getting wet, position the aquarium and its stand to one side of a wall mounted outlet to prevent water from dripping onto the outlet or plug. A "drip loop", shown in the figure below, should be arranged by the user for each cord, which connects the UV light to the outlet. If an extension cord is used, the "drip loop" is the part of the cord below the level of the outlet or the connect or that prevents water from traveling along the cord and coming in contact with the outlet. If the plug or outlet does get wet, DO NOT unplug the cord. Disconnect the fuse to the circuit breaker that supplies power to the UV light. Then, unplug and examine for the presence of water in the outlet. If you are not sure, consult a certified electrician.

POWER CORD



DRIP LOOP

3. Close supervision is necessary when the UV light is used near children.
4. This UV light is not allowed to use by persons (including children) with reduced physical sensory or mental capabilities or lack of experience and knowledge unless they have been given supervision or instruction concerning the use of the UV light by a person responsible for their safety.
5. To avoid injury, do not contact moving or hot parts.
6. Always unplug the UV light from the outlet when not in use, before putting on or taking off parts, maintenance, or placing hands in the water. Never yank the cord to pull the plug from the outlet. Grasp the plug and pull to disconnect.
7. Do not use the UV light for other than intended use. The use of attachments not recommended or sold by the appliance manufacturer may cause an unsafe condition and will void the warranty.
8. Do not install or store the UV light where it will be exposed to extreme weather or temperatures below freezing.
9. Make sure the UV light is securely installed before operating it.
10. Read and observe all the important notices on the UV light.
11. If an extension cord is necessary, a cord with a proper rating should be used, such as rated amperes or watts. A cord rated for fewer amperes or watts than the UV light rating may overheat. Care should be taken to arrange the cord so that it will not be tripped over or pulled.
12. The UV light is intended FOR HOUSEHOLD USE ONLY.
13. SAVE THIS USER MANUAL.

7. HYGGER LIMITED MANUFACTURER'S WARRANTY

We offer the end user of this product a manufacturer warranty of 3 (2) years from the date of sale if this product was purchased from a hygger[®]-authorised specialist dealer.

Retain receipt for any future warranty claim. Conditions apply. Products are guaranteed by hygger[®] Aquatic Supplies to the original purchaser against defective material and workmanship under normal use for a period up to 3 (2) years from the date of the original purchase through an Authorized Dealer. Refer to the User Manual included with your product for specific warranty details.

Products have no warranty if:

- 1.) The product has been serviced, modified or tampered with by anyone other than hygger[®] Aquatic Supplies.
- 2.) The product has been abused or damaged (including broken or cracked bulbs), and/ or.
- 3.) The product has been transported without proper packaging.
- 4.) The product was purchased from an Unauthorized Reseller.

WARRANTY LIABILITY DISCLAIMER

In no event will hygger[®] be liable for any consequential or incidental damages, including but not limited to, lost aquatic life, personal injury, property damage, equipment damage, lost profits, lost wages, lost savings, lost income, etc., arising out of the use of any hygger[®] products.

1.0. Terms and Conditions of Warranty.

- 1.1. hygger[®] warrants to the purchaser, for 3 (2) years from date of original purchase through an Authorized hygger[®] Reseller, free to repair or replace parts where fault is found due to defective materials or faulty workmanship and where goods do not operate in accordance with the instructions.
- 1.2. All claims for repair or replacement must be made at place of purchase.
- 1.3. Only the direct purchaser is entitled to warranty claims against us and these are not transferable without our consent.
- 1.4. The original and dated Proof of Purchase (receipt) must be supplied with all goods claims. Please also provide this Guarantee where possible.

- 1.5. Wear parts (e.g.: seals, suction devices, axes, pump wheels, light sources, pH electrodes, filter media, such as filter cartridges, as well as UVC burners), glass damage and the opening of the product, as well as structural changes or the use of non-hygger® original parts are excluded from the guarantee.
- 1.6. All goods subject to claim under Guarantee should be prepared for transportation in the original packaging or other comparable packaging which offers the same degree of protection and hygger® must incur no costs from the shipment.
- 1.7. Where claims on inspection reveal goods are in normal working order, hygger® will request reimbursement of all reasonable costs incurred.
- 1.8. Warranty claims do not exist in the case of only insignificant deviations from the agreed or customary condition or usability, e.g. insignificant deviations in colour, dimensions and/or quality or performance characteristics of the products.
- 1.9. Our warranty obligation extends only to the delivery of newly manufactured products. Unless otherwise agreed, used products are sold as seen, excluding any warranty.

For more warranty information, please see the hygger website.

8. DISPOSAL

Do not dispose of this product as unsorted municipal waste. Collection of such waste separately for special treatment is necessary. This product has to be disposed of at an authorized place for the recycling of electrical and electronic appliances rather than being disposed of together with the domestic waste. Collecting and recycling waste is a way of saving natural resources. So, please consult with your local seller to make sure the product is disposed of in an environmentally friendly way.



9. CONTACT INFORMATION

Distributed by: Hygger Aquarium, Inc.
13941 Magnolia Ave, Chino, CA 91710

Contact us at www.hygger-online.com
Email: mago@hygger-online.com

Trademarks of Shenzhen Mago Trading Co., Ltd
Bantian Group Business Center, Longgang,
Shenzhen City, China
All Rights Reserved

Made in China



Have a question? We're here to help:
USA Call: +1 (909) 590-2880
Mon-Fri: 9:00 am - 5:30 pm PST Sat-Sun: Closed

EC	REP
-----------	------------

Company: E-CrossStu GmbH
Address: Mainzer Landstr.69,60329
Frankfurt am Main
E-mail: e-crossstu@outlook.com
Tel: +49 69332967674

UK	REP
-----------	------------

CET Product Service Ltd.
Beacon House Stokenchurch Business
Park,Ibstone Rd,Stokenchurch
High Wycombe HP14 3FE UK
info.cetservice@gmail.com
+447419325266



MADE IN CHINA